

The Universal 'Complete' Stand Off


Safety

Please refer to original ladder manufacturer's manual for safety advice regarding ladder use.

- Keep the equipment in good condition.
- Replace or repair damaged parts. Use genuine parts only.
- **WARNING!** Never overreach when using the ladder stand off.
- **DO NOT** stand on the stand off tray. It is only for tools, paint pots etc.
- **DO NOT** use the stand off for any purpose other than that for which it is intended for.

Before assembly ensure the pack contains:

1. x1 Mainframe
2. x2 Rung Hooks
3. x5 Bolts, Nuts & Washers
4. x1 Spring Hook

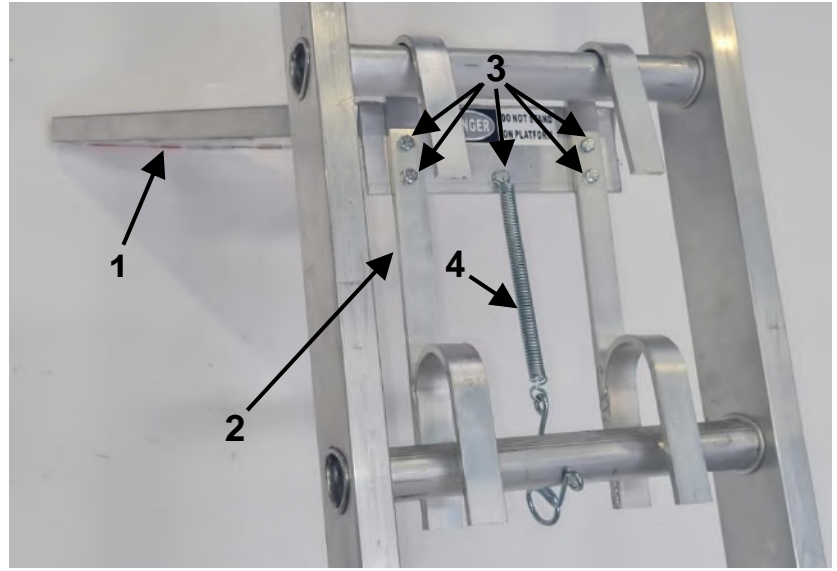

Assembly:

Bolt the unit together as seen in the picture above by connecting mainframe to the rung hooks (2) using 4 bolts, nuts and washers (3). Bolt the spring hook (4) into the centre hole on the main frame using the remaining bolt, nut and washer.

Fitting the Standoff:

The stand off should be fitted on the 2 top rungs of the ladder, ensure all four rung hooks engage with the ladder rungs. Then pull the spring hook down and connect with the rung to secure the standoff to the ladder (see 4 above). **WARNING!** Exercise caution when hooking the spring around the ladder rung as the spring is very strong. **DO NOT** stand on the stand off tray. It is only for tools, paint pots etc.

Maintenance

- Periodically check that all nuts are tight and secure but **DO NOT** over tighten.



Aluminium Scaffold Towers Ltd.

 01353 778811  sales@aluminium-scaffoldtowers.co.uk

 www.aluminium-scaffoldtowers.co.uk